


MEDIUM TRUCK



S-208

- Premier all-steel steer axle radial
- Reinforced bead constructed and durable carcass for excellent retreadability
- Decoupling groove for extended wear and stress relief sipes for all-weather traction

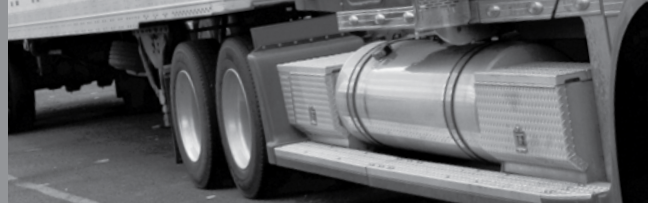

Item	Tire Size, Load Range, & Service Description	PR	Ship Weight lbs.	Meas. Rim Width (inches)	Tread Depth 32nds	Dual Max. Load	Dual Max. PSI	Single Max. Load	Single Max. PSI	Section Width	Overall Diameter	Eclipse Code
------	--	----	------------------	--------------------------	-------------------	----------------	---------------	------------------	-----------------	---------------	------------------	--------------

S-208

86409	255/70R22.5	BLK	H	16	93	7.5	16.5	4675	110	5205	110	10	36.6	25147
86433	295/75R22.5	BLK	G	14	124	8.25	19	5675	110	6175	110	11.3	39.9	16858
86431	11R22.5	BLK	G	14	124	8.25	19	5840	105	6175	105	10.9	41.5	16856
86434	285/75R24.5	BLK	G	14	129	8.25	19	5675	110	6175	110	10.7	41.5	16859
86432	11R24.5	BLK	G	14	136	8.25	19	6005	105	6610	105	10.9	43.4	16857
86418	11R22.5	BLK	H	16	135	8.25	19	6005	120	6610	120	10.9	41.5	30198
86419	11R24.5	BLK	H	16	135	8.25	19	6610	120	7160	120	10.9	43.4	30199

S-209

- Premier all-steel steer axle radial
- Reinforced bead constructed and durable carcass for excellent retreadability
- Features advanced tread pattern designed to increase mileage and resist wear



Item	Tire Size, Load Range, & Service Description	PR	Ship Weight lbs.	Meas. Rim Width (inches)	Tread Depth 32nds	Dual Max. Load	Dual Max. PSI	Single Max. Load	Single Max. PSI	Section Width	Overall Diameter	Eclipse Code
------	--	----	------------------	--------------------------	-------------------	----------------	---------------	------------------	-----------------	---------------	------------------	--------------

S-209

86403	225/70R19.5	BLK	F	12	67	6.75	15.5	3415	95	3640	95	8.9	31.9	25145
86407	245/70R19.5	BLK	G	14	79	7.5	16	4300	110	4540	110	9.8	33	25146
86456	8R19.5	BLK	F	12	62	6	12.1	3305	110	3525	110	8	33.8	35763
86455	235/75R17.5	BLK	H	16	65	6	12.6	5675	125	6005	125	9.4	31.5	35759
86454	215/75R17.5	BLK	H	16	53	6	12.1	4540	125	4805	125	8.5	30.5	35703
86307	265/70R19.5	BLK	G	14	83	7.5	16	5203	110	5512	110	10.3	34.1	44882

